


CUBE Sliding Gate Opener 1

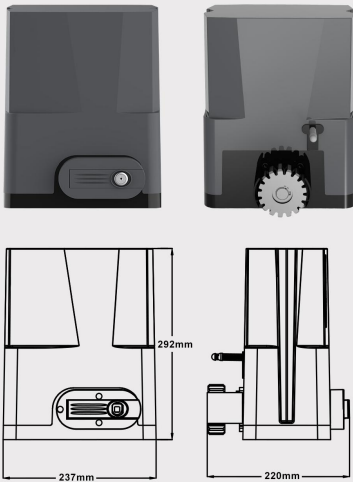

General

Specification

Unit Model	500AC	800AC	500DC	800DC
Power Supply	AC200V/50Hz AC110/60Hz			
Maximum gate weight	500KG	800KG	600KG	800KG
Motor Power	DC24V/150W	DC24V/170W	280W	380W
Output Torque	14N.m	18N.m	16N.m	18N.m
Output Shaft Height	46mm			
Limit Switch	Magnetic Limit Switch		Magnetic Or Spring Limit Switch	
Gate Moving Speed	13m/min	15m/min	11-13m/min	11-13m/min
Remote Control Range	≥30m			
Recording Of Up Remote	25			
Frequency	433.92MHz			
Work Duty	S2 20min			
Noise	≤56dB	≤58dB	≤56dB	≤58dB
Working Temperature	-20 ℃ ~ +70 ℃			
Backup Battery	Optional		----	
Driving Mode	Gear	Gear	Gear	Gear
Package Weight	11.00kg	11.00kg	10.00kg	10.00kg



CUBE Sliding Gate Opener 2



Sliding Gate Opener

CBS Series

500Kg - 800Kg - 1500Kg

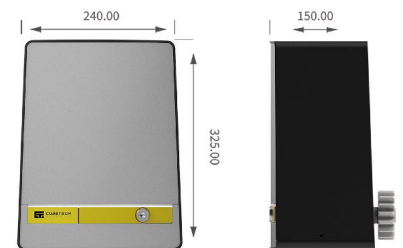

General

Features

- 12 Shortcut Keys
- 10 Dip Switch Functions
- Upgraded WIFI Module
- Upgraded Wireless Sensor Module
- High-Precision Encoder
- Relay Function
- Backup Battery
- Multiple Accessories Interfaces

Specification

- Input Power : 110-230V 50-60Hz
- Class of protection : IP54
- Maximum Loading weight : 500kg 800kg 1500Kg
- Speed : 200-400 mm/s 200-600 mm/s 200-600 mm/s
- Limit Switch : Mechanical Magnetic
- Frequency : 433Mhz 868Mhz
- Wi-Fi : Optional Module
- Sound Emission Level : ≤ 70dB(A)
- Thermal protection : 105 ℃
- Wireless sensor receiver : Optional Module
- Temperature range ℃ -20 ℃ ~ +60 ℃